

DESCRIZIONE / DESCRIPTION

Valvola a sfera a passaggio totale F/F anti legionella
015-025 c/premistoppa, leva a T prolungata

*Anti-legionella full way ball valve 015-025 F/F with
stuffing box with extended T handle*


FOTO / PICTURE



CARATTERISTICHE / FEATURES

- corpo, manicotto e sfera in CW617N.
- premistoppa e asta in CW614N.
- sfera lavorata con utensile in diamante, cromata.
- sedi in P.T.F.E. vergine dimensionate con angolo di tenuta di 7° min.
- guarnizione tenuta asta: anello in PTFE.
- leva di comando in Nylon-*Alluminio
- finitura superficiale sabbiata nichelata, filettature gialle.
- filettature ISO 228/1
- PN 30÷40, max. temp. -20° +130°C
- brass CW617N body and connection and ball.
- brass CW614N stuffing box and stem.
- ball ground by diamond-tipped tool, chromium plated.
- virgin P.T.F.E. seats with 7° min. tightness angle.
- stem tightness: PTFE ring.
- Nylon-*Aluminium T handle
- nickel plated finishing with yellow threads.
- threading to ISO 228/1.
- PN 30÷40, max. temp. -20° + 130°C

DIMENSIONI PRINCIPALI / LEADING DIMENSIONS

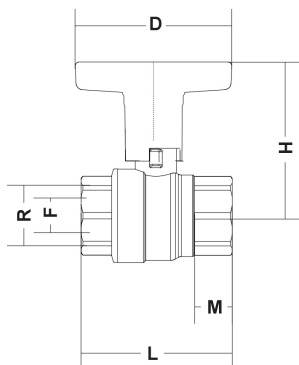

| R | 1/2 | 3/4 | 1 | 1 ¼ | 1 ½ | 2 |
|---|-----|-----|-----|-----|------|------|
| D | 60 | 60 | *82 | *82 | *105 | *105 |
| H | 57 | 60 | 78 | 88 | 95 | 101 |
| L | 57 | 63 | 75 | 89 | 98 | 119 |
| M | 15 | 16 | 18 | 20 | 21 | 25 |
| F | 15 | 20 | 25 | 32 | 40 | 50 |

PRESSIONI DI ESERCIZIO A MAX 80°C / WORKING PREASSURES AT 80°C

| | | | | | | | |
|-------|------|------|----|------|------|----|------------|
| PN 40 | * | * | * | | | | p.s.i. 600 |
| PN 30 | | | | * | * | * | p.s.i. 435 |
| PN 25 | | | | | | | p.s.i. 350 |
| PN 20 | | | | | | | p.s.i. 300 |
| | 1/2" | 3/4" | 1" | 1 ¼" | 1 ½" | 2" | |

PERDITE DI CARICO / PRESSURE DROPS

| | | | | | | |
|----|-----|-----|------|-----|-----|-----|
| R" | 1/2 | 3/4 | 1 | 1 ¼ | 1 ½ | 2 |
| Kv | 15 | 30 | 57.5 | 94 | 160 | 265 |

$$\Delta P [\text{mm H}_2\text{O}] = 10.000 \times \left[\frac{G [\text{mc/ h}]}{Kv} \right]^2$$