

DESCRIZIONE / DESCRIPTION

Rubinetto con portagomma a sfera compatto con foro anti-legionella.

Hose union ball bibcock Compaq type with anti-legionella hole.

CARATTERISTICHE / FEATURES

- corpo, sfera, asta e portagomma in ottone CW617N.
- sfera lavorata con utensile in diamante, cromata.
- sedi in P.T.F.E. vergine.
- guarnizione tenuta asta: O-ring in gomma NBR e anello in PTFE.
- leva di comando in alluminio LP, in acciaio ST
- finitura nichelata, filettature gialle
- filettature ISO 228/1
- PN 25: TEMP. : -20°C ÷ 120°C

FOTO / PICTURE




2063 ST



2063 LP

- brass CW617N body, ball, stem and nut and tail.
- ball ground by diamond-tipped tool, chromium plated.
- virgin P.T.F.E. seats.
- O-ring stem packing in NBR rubber and PTFE ring.
- Aluminium lever LP, steel ST
- Nickel plated finishing with yellow threads
- threading to ISO 228/1.
- PN 25: TEMP. : -20°C ÷ 120°C

DIMENSIONI PRINCIPALI / LEADING DIMENSIONS

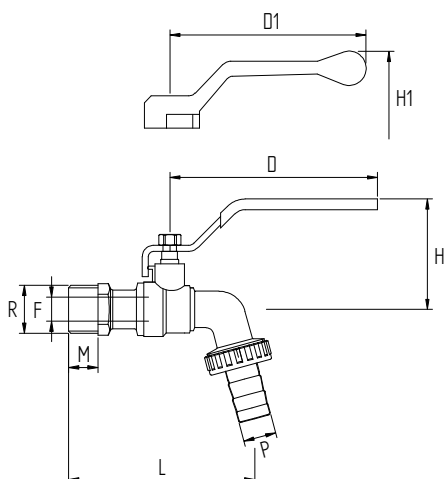

R	1/2"	3/4"
D	90	90
D1	83	83
H	46.5	47.5
H1	41	43
L	83	93
M	9.5	10.5
F	9	11
P	15	21

PRESSIONI DI ESERCIZIO A MAX 80°C / WORKING PREASSURES AT 80°C

PN 25	*	*	p.s.i. 350
	1/2"	3/4"	

PERDITE DI CARICO / PRESSURE DROPS

R"	1/2	3/4
Kv	9	12

