

DESCRIZIONE / DESCRIPTION

Rubinetto a collo ottone lucido con portagomma

Nek bibcock T lever shiny brass with hose union


FOTO / PICTURE



CARATTERISTICHE / FEATURES

- corpo, leva, asta e bocchettone in ottone CW617N.
- guarnizione tenuta asta: o-ring in gomma NBR
- finitura superficiale lucido
- filettature ISO 228/1
- PN 20: TEMP. : -20°C ÷ 120°C
- *brass CW617N body, lever, stem, nut and tail.*
- *o-ring stem packing in NBR rubber.*
- *finishing shiny*
- *threading to ISO 228/1.*
- *PN 20: TEMP. : -20°C ÷ 120°C*

DIMENSIONI PRINCIPALI / LEADING DIMENSIONS

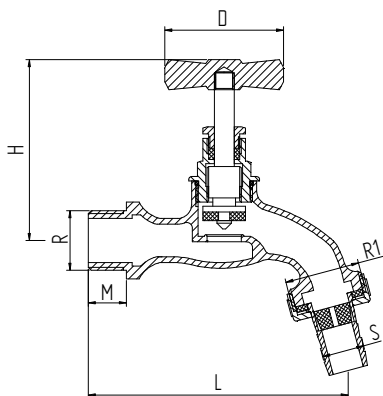

R"xR1	1/2x3/4	3/4x1
D	42	42
H	70	80
L	95	115
M	12	15
S	15	20.5

PRESSIONI DI ESERCIZIO A MAX 80°C / WORKING PREASSURES AT 80°C

PN 40							p.s.i. 600
PN 30							p.s.i. 435
PN 25							p.s.i. 350
PN 20	*	*					p.s.i. 300
PN 16							p.s.i. 250
PN 10							p.s.i. 150
	1/2"	3/4"	1"	1 1/4"	1 1/2"	2"	