

### DESCRIZIONE - DESCRIPTION

Valvola a sfera angolo M/F con calotta libera  
leva alluminio nera


*Angle ball valve M/F swivel nut with black metal handle.*



### CARATTERISTICHE - FEATURES

- corpo, sfera, asta e calotta in ottone CW617N-DW.
- sfera lavorata con utensile in diamante, cromata.
- sedi in P.T.F.E. vergine.
- guarnizione tenuta asta: O-rings in gomma NBR
- leva di comando in alluminio.
- finitura superficiale sabbiata nichelata, filettature gialle.
- filettature ISO 228/1
- PN 25: TEMP. : -20°C ÷ 120°C  
Massima percentuale di glicole 50%
- *brass CW617N-DW body, ball, stem, and nut.*
- *ball ground by diamond-tipped tool, chromium plated.*
- *virgin P.T.F.E. seats.*
- *O-rings stem packing in NBR rubber O-ring.*
- *Aluminium lever.*
- *nickel plated finishing with yellow threads.*
- *threading to ISO 228/1.*
- *PN 25: TEMP. : -20°C ÷ 120°C*  
*Max glycol 50%*

### DIMENSIONI PRINCIPALI - LEADING DIMENSIONS

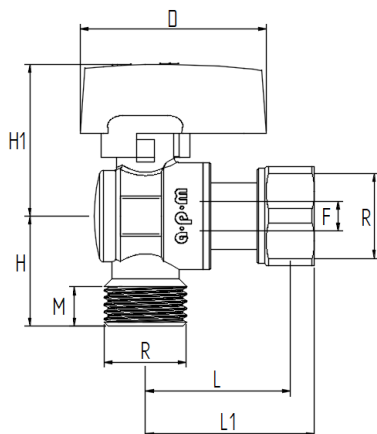

R	1/2x1/2	3/4x3/4
D	47	47
H	33	33
H1	38	41.7
M	10	11
L	36.5	36.5
L1	46	46.5
F	12.5	15

### PRESSIONI DI ESERCIZIO A MAX 80°C - WORKING PREASSURES AT 80°C

PN 25	*	*	psi 362
	1/2"	3/4"	

### PERDITE DI CARICO - PRESSURE DROPS

R	1/2	3/4
Kv	9	13

