

**DESCRIZIONE - DESCRIPTION**

Testa termostatica con sensore a liquido

Thermostatic head with liquid sensor

Tête thermostatique avec capteur liquide



2THCC



2THBB



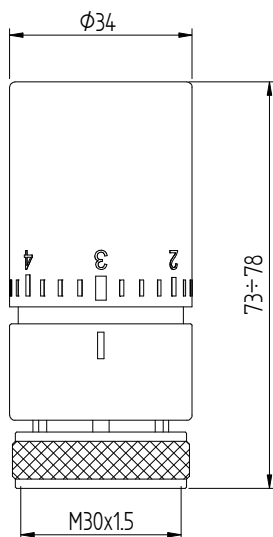
2THNN

P. Max 10 bar

T. Max 100°C

**CARATTERISTICHE – FEATURES**

- |                                                                                                                         |         |                                                                                                      |         |
|-------------------------------------------------------------------------------------------------------------------------|---------|------------------------------------------------------------------------------------------------------|---------|
| • Tempo di risposta<br>Response time<br>Temps de réponse                                                                | 26 min  | • Isteresi, Hysteresis,<br>Hystérésis                                                                | 0.4 K   |
| • Influenza della pressione differenziale<br>Differential pressure influence<br>Influence de la pression différentielle | 0.80 K  | • Influenza della temp. dell'acqua<br>Water temperature influence<br>Influence de la temp. du fluide | 0.80 K  |
| • Max pressione differenziale<br>Max differential pressure<br>Pression différentielle max                               | 1.0 bar | • Portata nominale<br>Nominal flow rate<br>Debit                                                     | 150 l/h |

**DIMENSIONI PRINCIPALI - LEADING DIMENSIONS**

**Campo regolazione temperatura  
Field temperature control**
